

CAPTIVE SCREW

- High Profile design for hand operation
- Spring-ejected
- Color management for plastic material is available
- Plastic knob can isolate ambient heat source and static

27 SERIES CAPTIVE SCREW Ø14.7mm High Profile (M6/M8 thread)

Patented.



Material and Finish

KNOB:
PLASTIC : PANTONE BLACK


SCREW:
CARBON STEEL, ZINC FINISH

FERRULE:
6000 SERIES ALUMINUM, NATURAL FINISH

SPRING:
300 SERIES STAINLESS STEEL, NATURAL FINISH

WASHER:
300 SERIES STAINLESS STEEL, NATURAL FINISH

Panel Preparation

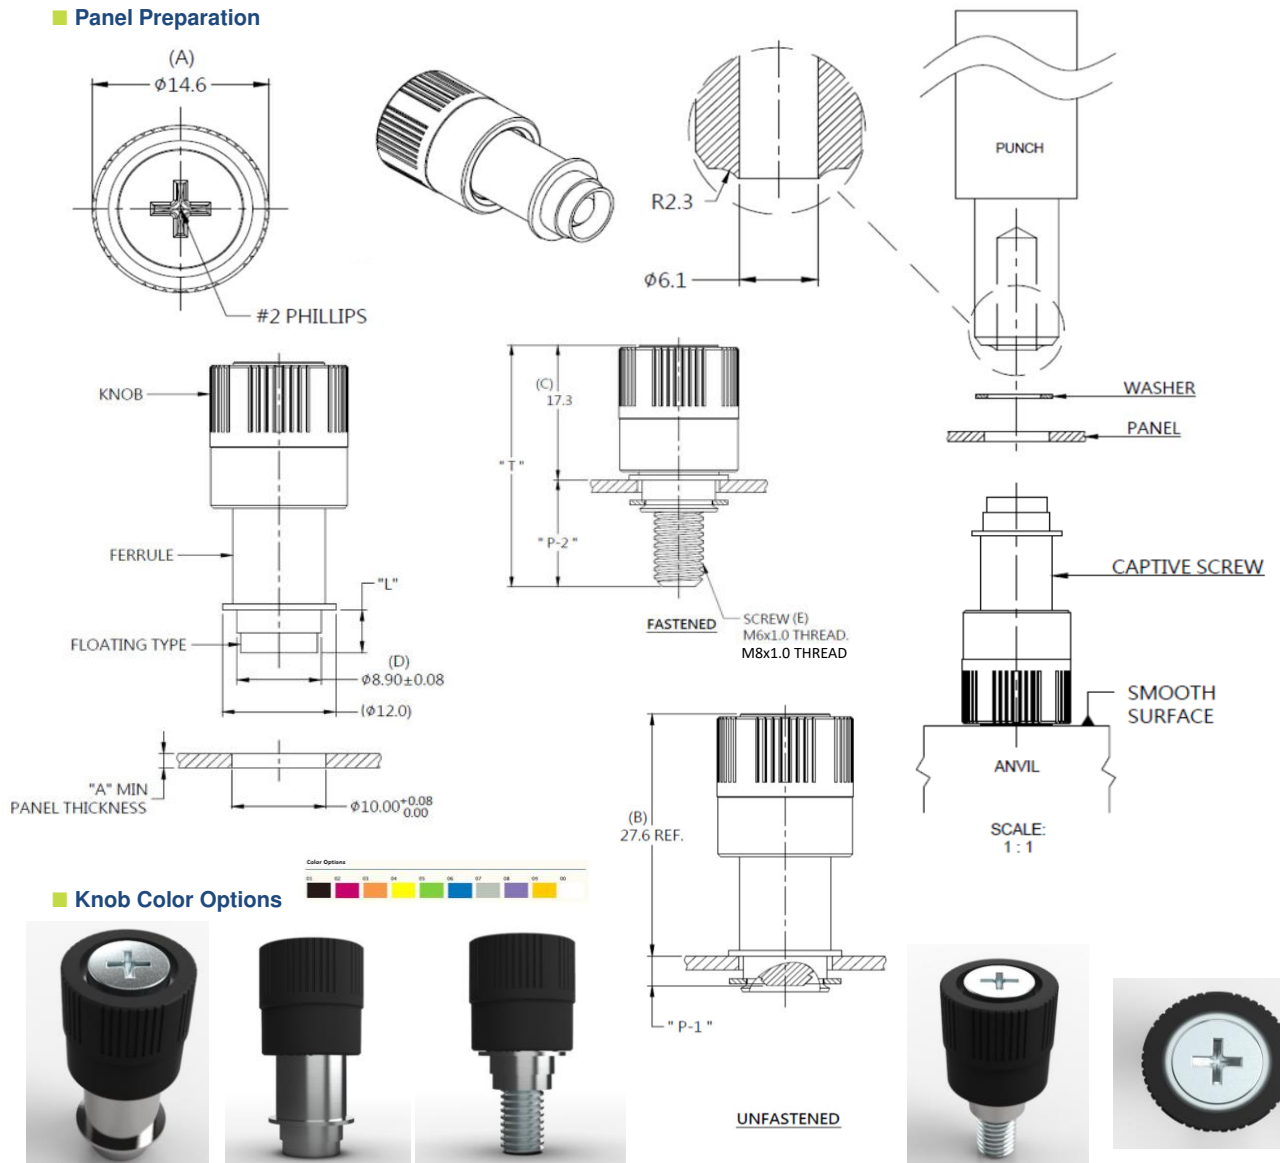

Knob Color Options

Dimensions (mm)

SCREW LENGTH "T"	SCREW PROJECTION		PANEL THICKNESS		DIMENSINOS	
	"P-1"	"P-2"	"A" MIN	"A" MAX	" L "	" B "
31.0	3.4	13.7	1.6	2.4	4.8	

Copyright © Since 2007-2018 Fivetech Technology Inc. All Right Reserved.