

- SMT fully automated manufacturing process can increase production stability and production efficiency.
- Welding for reinstallation can increase product reliability.
- Spool designed for easy assembly, quick release purposes.
- Lateral fastening contributes to direction limited panels.


SMT SPOOL Patented.






Material and Finish

Spool :
Carbon steel, Tin Finish.




Reel



Panel Preparation

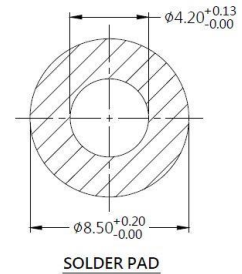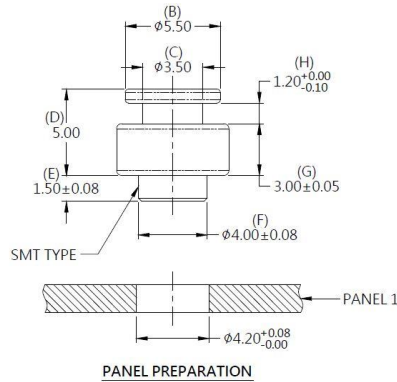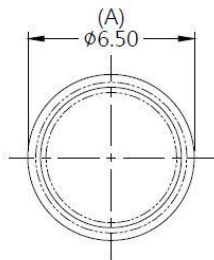

Installation

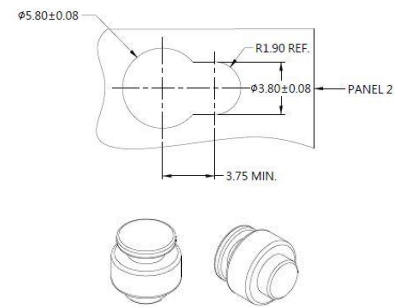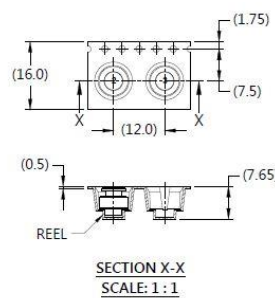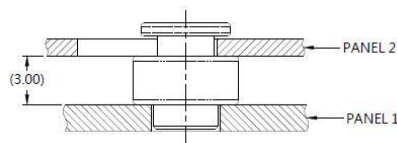

Dimensions (mm)

P/N	PANEL THICKNESS	
	PANEL 1	PANEL 2
82-050-02-050-02-RL	1.6 MIN.	1.0 MAX.