- Special two-step design provides quick disassembly and assembly performance of double-layer.
- Maximizes space efficiency in compact server cases.
- The intuitive operation provides the horizontal positioning function.
- Replace the traditional way of using the screw to fasten, effectively saving time and cost.
- The specification could be customized.

Double Spool


Patented.





Material and Finish

SPOOL: 300 SERIES STAINLESS STEEL, NATURAL FINISH.

Panel Preparation




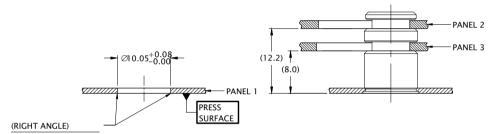



(D) 15.30

(E)

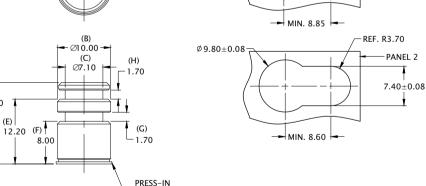

Ø10.30±0.08

REF. R3.70 PANEL 3

7.40±0.08

Dimensions (mm)

LENGTH "T"	PROJECTION		PANEL THICKNESS			DIMENSIONS	
	"P-1"	"P-2"	Panel 1	Panel 2	Panel 3	" L "	" B "
~	~	~	1.0	1.5	1.5	~	~

TYPE