

CAPTIVE SCREW

- Fast positioning device is a fast solution that does not require extra tools.
- Designed for hand operation.
- Spring-ejected.
- The size of device and assembly method could be customized.

27 SERIES Captive Screw Ø10mm Patented.



Material and Finish




Knob :
 6000 Series Aluminum, Plastic
Screw :
 400 Series Stainless Steel, Natural Finish.
Spring :
 300 Series Stainless Steel, Natural Finish.
Ferrule :
 Press-in : Hardened Carbon Steel, Zinc Finish.
 Flare-in : 6000 Series Aluminum, Natural Finish.

Recess Style




Installation Style

Knob High and Screw Projection (Press-in Style Show)

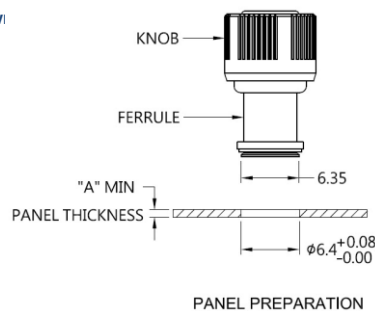

Knob Color Options



Dimensions

INSTALLATION STYLE	THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
		A MIN	A MAX	T	P-1	P-2	H-1	H-2
Press-in Style	M3	0.8	-	15.6	0.5	4.4	15.1	11.2
Flare-in Style	M3	1.0	-	15.6	0.6	4.2	15.2	11.4