

CAPTIVE SCREW

- High Profile design for hand operation
- Spring-ejected
- Color management for plastic material is available
- Plastic knob can isolate ambient heat source and static

27 SERIES CAPTIVE SCREW Ø13.35mm High Profile Patented.



Material and Finish

KNOB:
6000 SERIES ALUMINUM , PLASTIC : PANTONE 376C(GREEN).


SCREW:
400 SERIES STAINLESS STEEL , NATUAL FINISH.

SPRING:
300 SERIES STAINLESS STEEL , NATUAL FINISH.

FERRULE:
6000 SERIES ALUMINUM, NATUAL FINISH.

WASHER:
300 SERIES STAINLESS STEEL , NATUAL FINISH.

■ Panel Preparation

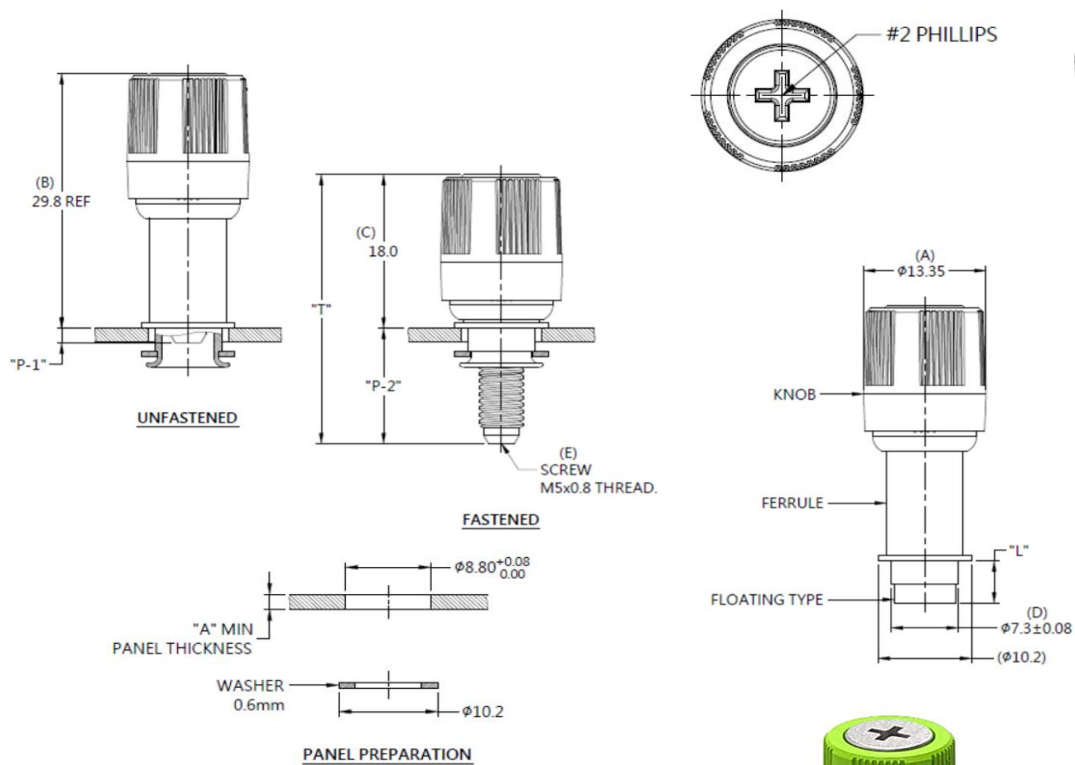

■ Knob Color Options



■ Dimensions (mm)

SCREW LENGTH "T"	SCREW PROJECTION		PANEL THICKNESS		DIMENSINOS	
	"P-1"	"P-2"	"A" MIN	"A" MAX	" L "	" B "
31.5	1.7	13.5	1.6	2.5	4.9	~

Copyright © Since 2007-2018 Fivetech Technology Inc. All Right Reserved.