

CAPTIVE SCREW

- Fast positioning device is a fast solution that does not require extra tools.
- Designed for hand operation.
- Spring-ejected.
- The size of device and assembly method could be customized.

13 SERIES Captive Screw Ø8.5mm Patented.



Material and Finish

Knob :
6000 Series Aluminum, Natural Finish.
Screw :
400 Series Stainless Steel, Natural Finish.
Spring :
300 Series Stainless Steel, Natural Finish.
Ferrule :
Hardened Carbon Steel, Zinc Finish.

■ Recess Style




PHILLIPS
No.2
Phillips Recess




6L
T15

■ Knob High and Screw Projection

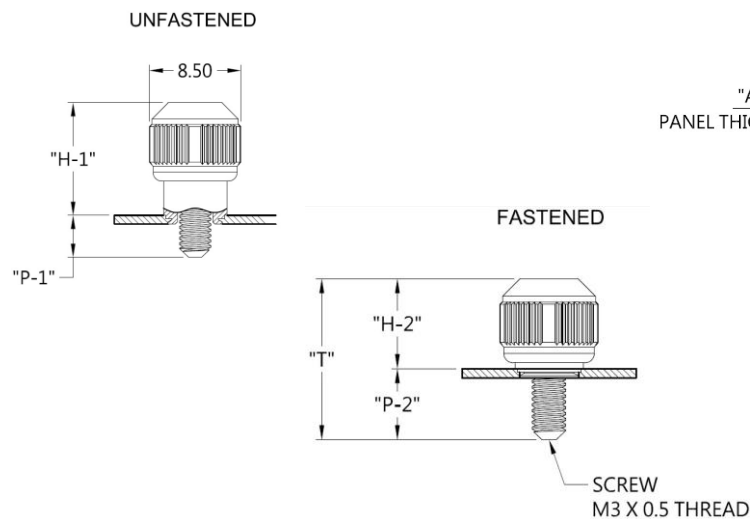

■ Installation Style

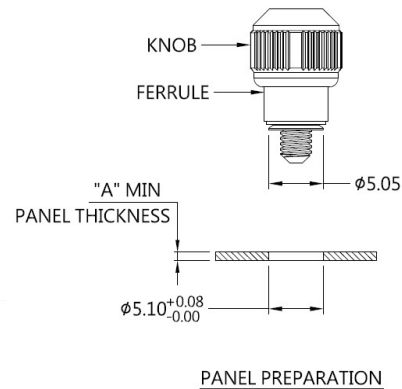

■ Dimensions

INSTALLATION STYLE	THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
		A MIN	A MAX	T	P-1	P-2	H-1	H-2
Press-in Style	M3	0.8	-	13.8	3.45	6.1	10.35	7.70