

- Color management for plastic material is available as required by customers
- Plastic knob can isolate ambient heat source and static

27 SERIES



Material and Finish

Knob:
6000 Series aluminum, plastic "pp".

Screw:
400 Series stainless steel, passivated.


Spring:
300 Series stainless steel, natural.

Ferrule:
Press-in: Hardened carbon steel, zinc finish.
P.C.Board: 300 Series stainless steel, natural.


■ Recess Style



■ Knob Height and Screw Projection (Press-in Style Shown)

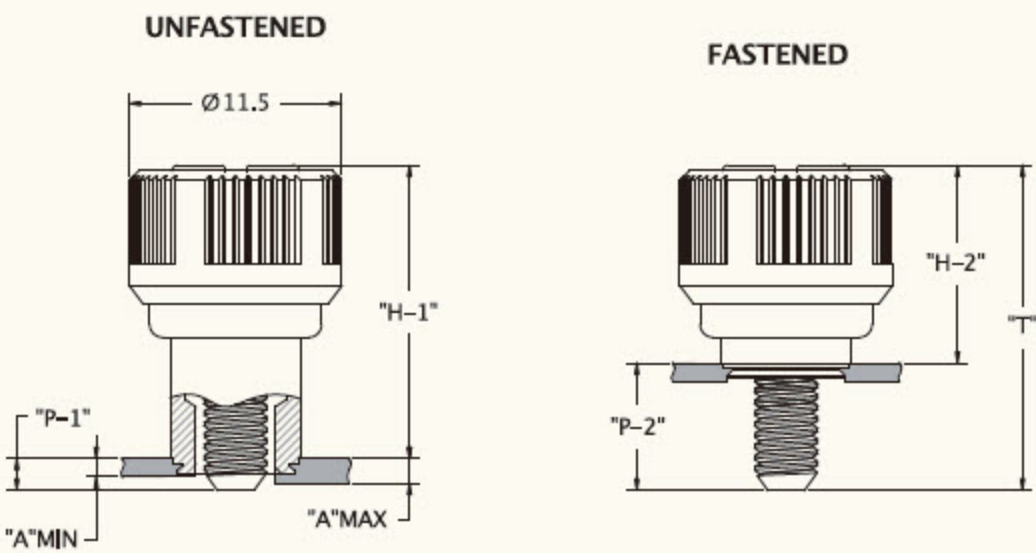

■ Installation Style

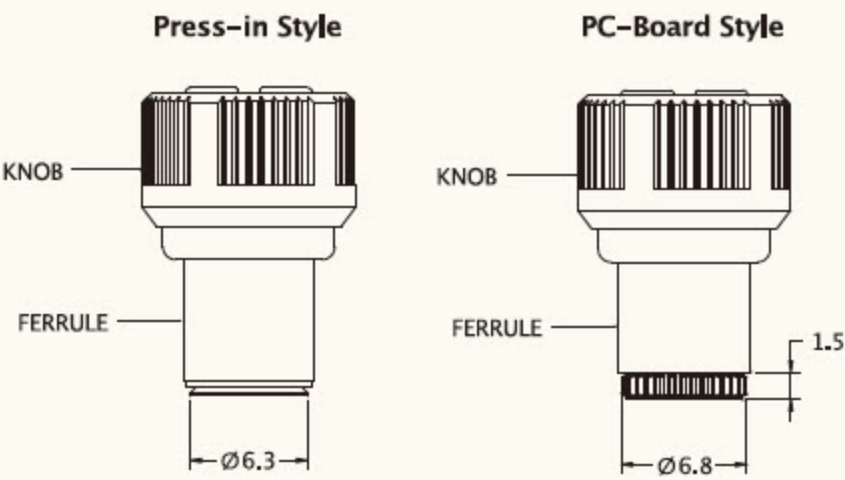

■ Knob Color Options

Standard colors							
01	02	03	04	05	06	07	08

■ 6-32 Thread Size

27-412-440-() ← 01~08 (color number.)

INSTALLATION STYLE	OUTER PANEL DIMENSIONS			KNOB HEIGHT		SCREW PROJECTION		TOTAL FLOAT	PART NUMBER				
	A MIN	A MAX	B	H-1	H-2	P-1	P-2		Slot Recess	Phillips Recess	6L Recess	6L/Slot Recess	Phillips/Slot Recess
Press-in Style	0.8	~	~	15.9	10.7	0.6	5.8	0.5	27-412-140-()	27-412-240-()	27-412-340-()	27-412-440-()	27-412-540-()
	0.8	~	~	15.9	10.7	2.1	7.3		27-412-150-()	27-412-250-()	27-412-350-()	27-412-450-()	27-412-550-()
PC-Board Style	1.6	~	~	15.2	10.0	1.3	6.5		27-440-140-()	27-440-240-()	27-440-340-()	27-440-440-()	27-440-540-()
	1.6	~	~	15.2	10.0	2.8	8.0		27-440-150-()	27-440-250-()	27-440-350-()	27-440-450-()	27-440-550-()

Installation for all styles
For panel preparation and installation instructions, see page 34 and 35.