

CAPTIVE SCREW

- Fast positioning device is a fast solution that does not require extra tools.
- Designed for hand operation.
- Spring-ejected.
- The size of device and assembly method could be customized.

27 SERIES Captive Screw Ø13mm



Material and Finish

Knob :
6000 Series Aluminum, Plastic

Screw :
Hardened Carbon Steel, Zinc Finish.

Spring :
300 Series Stainless Steel, Natural Finish.

Ferrule :
6000 Series Aluminum, Natural Finish.


Washer :
300 Series Stainless Steel, Natural Finish.

Recess Style




Installation Style

Knob High and Screw Projection

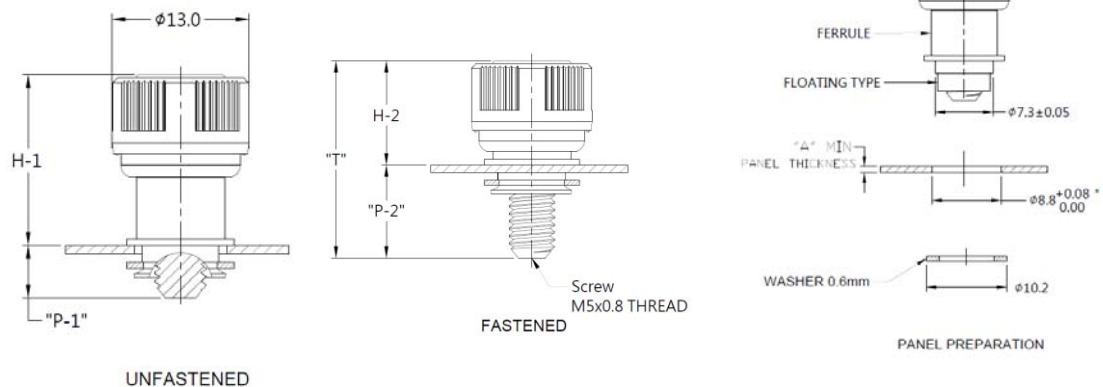

Knob Color Options



Dimensions

INSTALLATION STYLE	THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
		A MIN	A MAX	T	P-1	P-2	H-1	H-2
Floating Style	M5	0.8	-	21.2	5.0	10	16.2	11.2