

- Security function: the outer part is a self-rotating mechanism that only a tool matching the screw head can dismantle
- Special head shapes and tools could be custom-made according to customers' requirements


32 SERIES




Material and Finish

- Knob:**
6000 Series aluminum, natural.
- Screw:**
400 Series stainless steel, passivated.
- Spring:**
300 Series stainless steel.
- Ferrule:**
Hardened carbon steel, nickel finish.

■ Recess Style

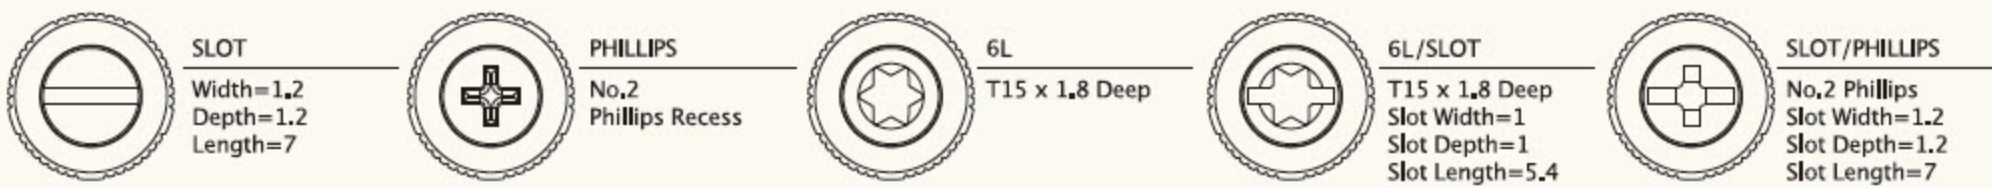

■ Knob Height and Screw Projection (Press-in Style Shown)

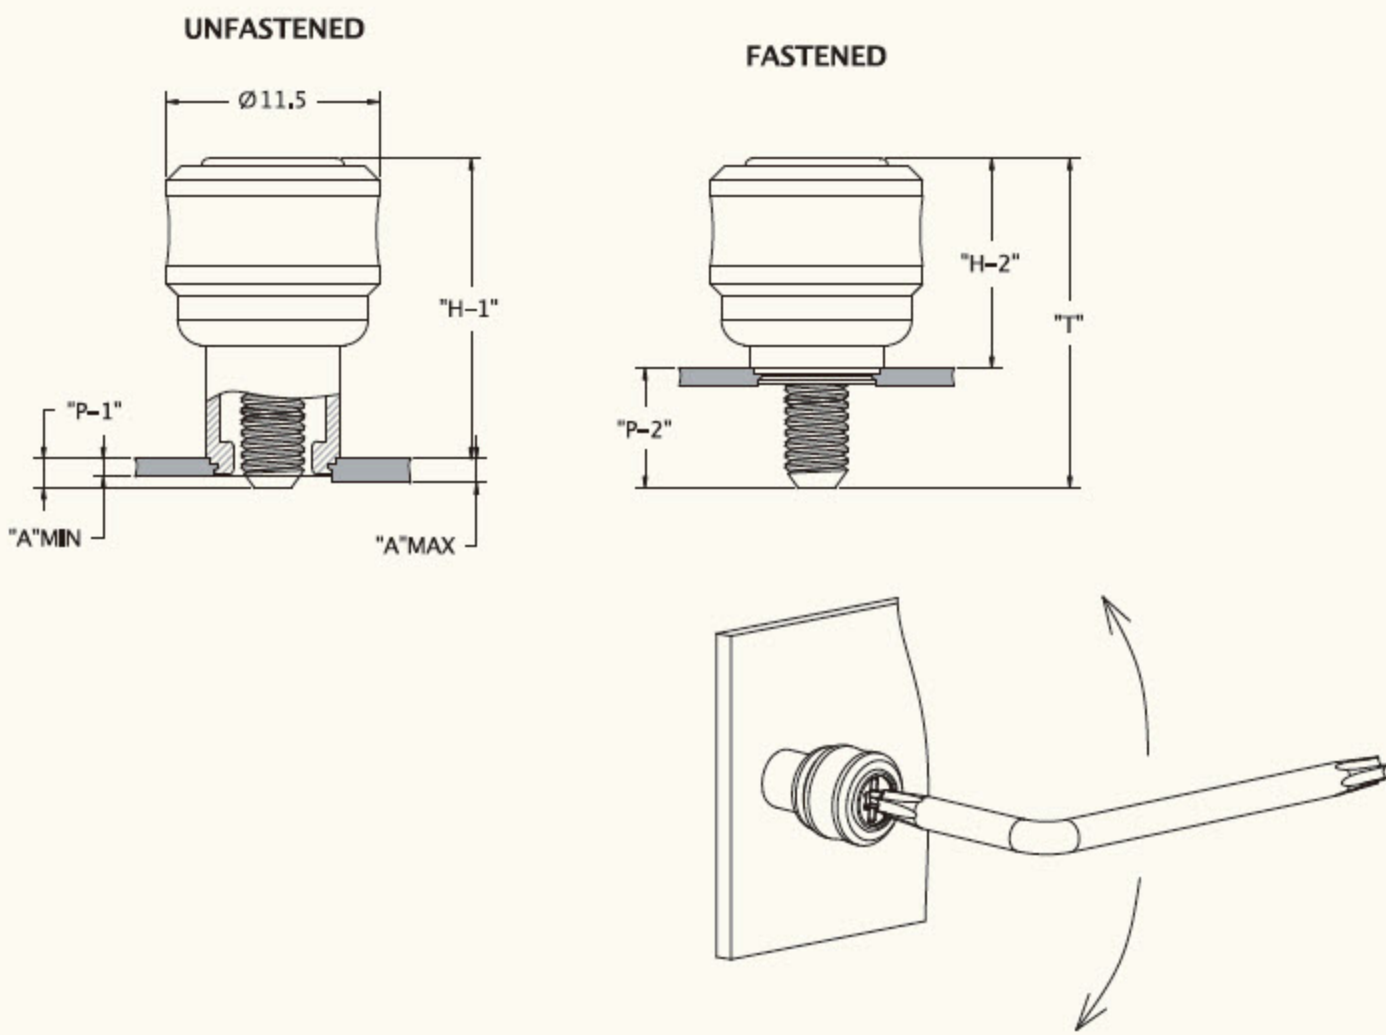

■ Installation Style

■ 6-32 Thread Size

mm

INSTALLATION STYLE	OUTER PANEL DIMENSIONS			KNOB HEIGHT		SCREW PROJECTION		FLANGE LENGTH L	TOTAL FLOAT	PART NUMBER				
	A MIN	A MAX	B	H-1	H-2	P-1	P-2			Slot Recess	Phillips Recess	6L Recess	6L/Slot Recess	Phillips/Slot Recess
Press-in Style	0.8	~	~	16.1	11.4	0.4	5.1	~	0.8	32-412-140	32-412-240	32-412-340	32-412-440	32-412-540