

- Fast positioning device is a fast solution that does not require extra tools
- Low profile design for hand operation


43 SERIES




Material and Finish

- Knob:**
6000 Series aluminum.
- Screw:**
Alloysteel, zinc finish.
- Spring:**
300 Series stainless steel.
- Ferrule:**
Hardened carbon steel, zinc finish.

■ Recess Style

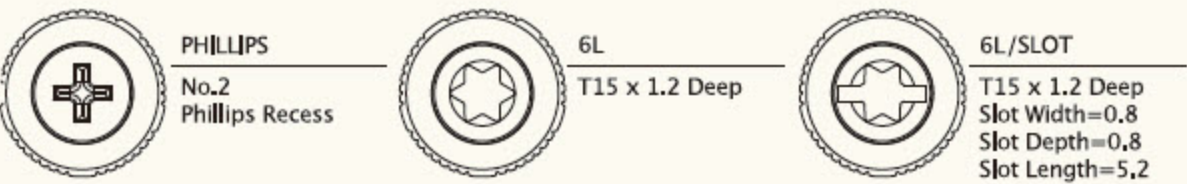


■ Knob Height and Screw Projection

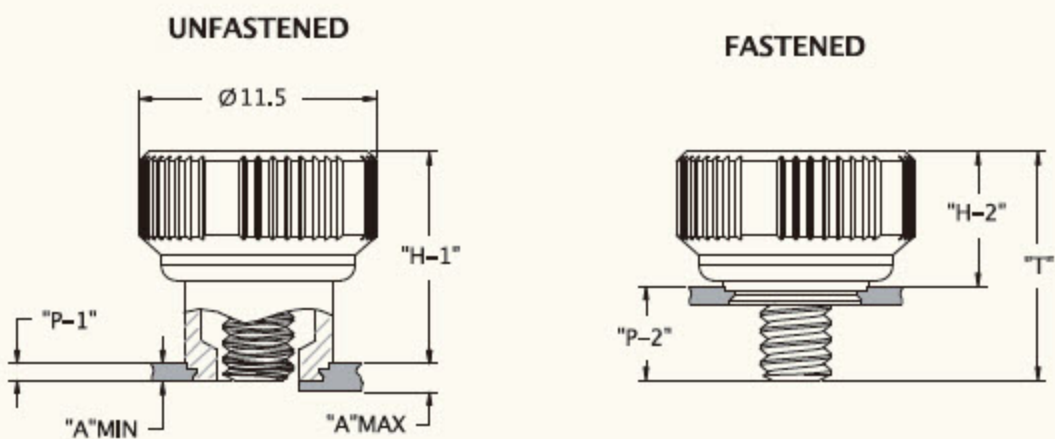

■ Styled Knob Series
Panel Preparation and Installation

Thread Size	ØD	Clearance Hole +0.2 (+.008) -0.1 (-.004)
#6-32	6.4 ^{+0.08} ₋₀ (.250 ^{+0.003} _{-.000})	3.7 (.146)

■ Installation Style

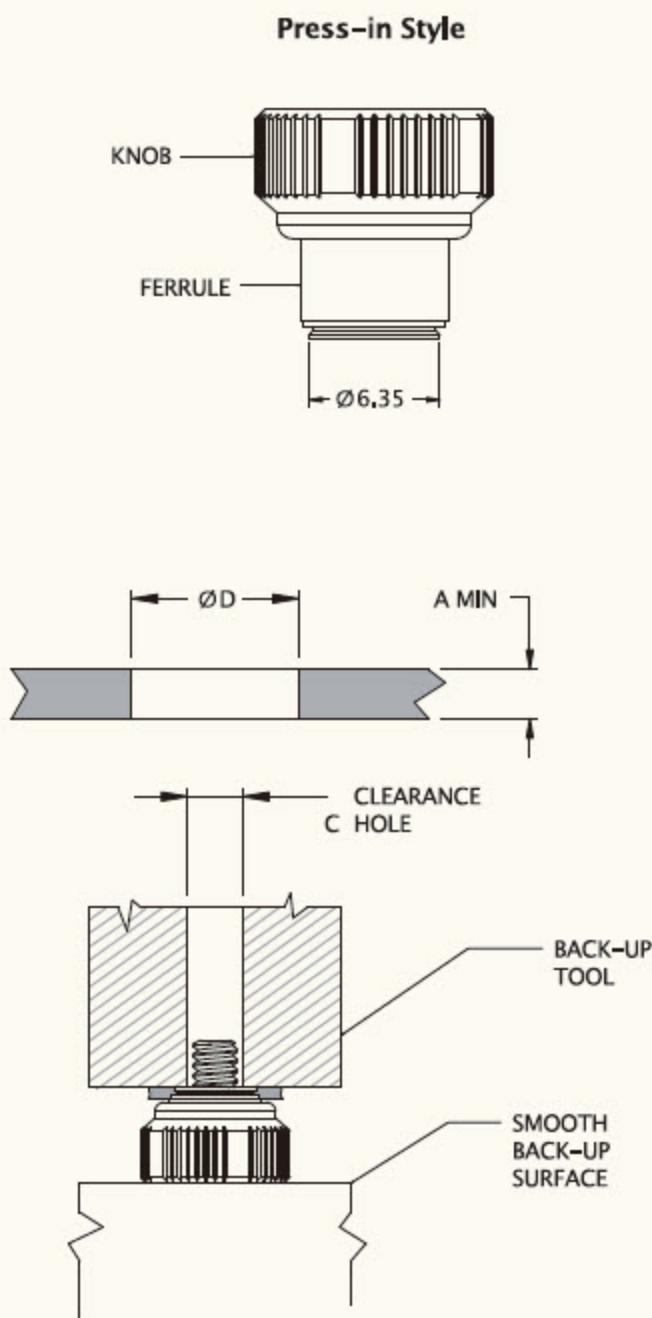

■ Dimensions

mm

THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT		TOTAL FLOAT	PART NUMBER		
	A MIN	A MAX	T	P-1	P-2	H-1	H-2		Phillips Recess	6L Recess	6L/Slot Recess
#6-32	0.80	~	10.8	0.6	4.3	10.2	6.5	0.6	43-412-200	43-412-300	43-412-400
			12.8	1.4	5.1	10.2	6.5		43-412-290	43-412-390	43-412-490