

- Designed for hand operation
- Low profile design suitable for lower assembling space
- Small and compact design for limited space

44 SERIES (HEX) patented.




Material and Finish

Screw:
Hardened carbon steel, zinc finish.


Spring:
300 Series stainless steel.

Ferrule:
Hardened carbon steel, zinc finish.


■ Recess Style




■ Knob Height and Screw Projection

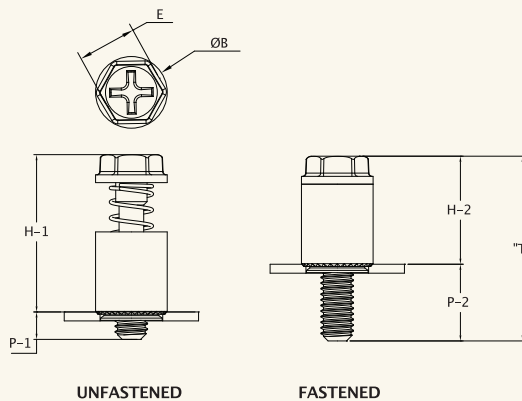

■ Styled Knob Series Panel Preparation and Installation



■ Press-in Style



Thread Size	ØD	Clearance Hole +0.2 (+.008) -0.1 (-.004)
M3	5.6 ^{+0.08} ₋₀ (.220 ^{+0.003} _{-.000})	3.2 (.125)

■ Dimensions

mm

THREAD	KNOB DIAMETER			OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT		TOTAL FLOAT	PART NUMBER
	B	ØC	E	A MIN	A MAX	T	P-1	P-2	H-1	H-2		SLOT
M3	6.5	5.5	5.6	0.80	~	16.5	2.5	6.9	14.0	9.6	0.3	44-111-749