

Security Kit 430, safety lock with mechanical mechanism

- press-in assembly, easy to operate
- Required key to open the lock
- Required little space so that there is no problem with mechanical interference
- The head mechanism is accompanied with mechanical design

430 SERIES patented.



Material and Finish

Screw:

Hardened carbon steel, nickel finish.

Spring:

300 Series stainless steel.

Ferrule:

Hardened carbon steel, nickel finish.


Key:

Zinc Alloy(Die-Cast), zinc finish.


■ Recess Style




■ Driver Key




■ Installation Style

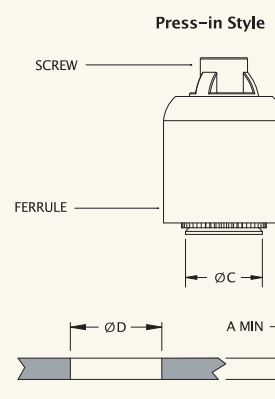

■ Knob Height and Screw Projection

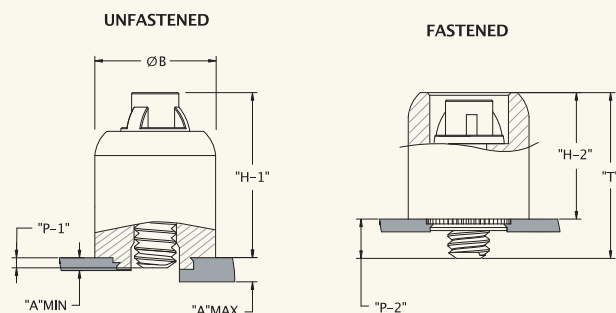

■ Styled Knob Series Panel Preparation and Installation

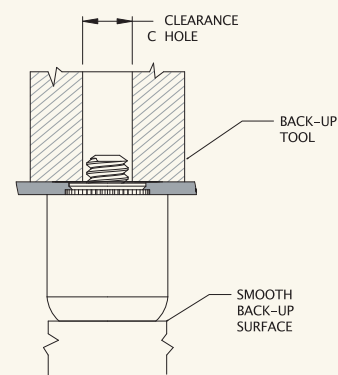

For Thread Size	ØD	Clearance Hole +0.2 (+.008) -0.1 (-.004)
#6-32	6.4 ^{+.08} _{-.0} (.250 ^{+.003} _{-.000})	3.7 (.146)

■ Dimensions

mm

THREAD	Ferrule Diameter		OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT		TOTAL FLOAT	PART NUMBER
	B	C	A MIN	A MAX	T	P-1	P-2	H-1	H-2		
6-32	10	6.3	1.0	1.2	13.7	0.1	3.3	13.6	10.4	0.4	36-430-137k
					14.7	1.1	4.3	13.6	10.4	0.4	36-430-147k