

SMT Series

- Material of plastic knob can sustain high temperature on SMT process.
- Production follows standard SMT process.
- Color management is available as required by customers.
- Functional device which prevents thread damage caused by inflow of tin in SMT process.

29 SERIES SMT Captive Screw Ø10mm patented.



Material and Finish

Knob :
6000 Series Aluminum, Plastic.
Screw :
400 Series Stainless Steel, Natural Finish.
Spring :
300 Series Stainless Steel, Natural Finish.
Ferrule :
Carbon Steel, Tin Finish.


Reel





Recess Style




Installation Style



Knob High and Screw Projection

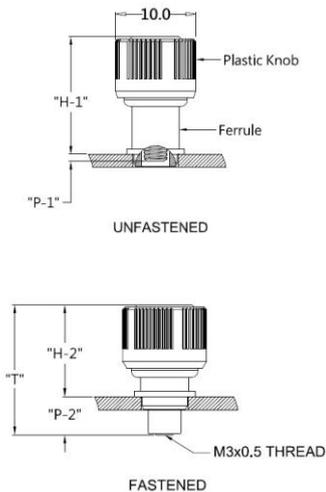

Installation

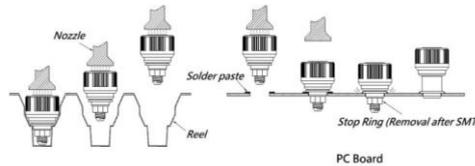

Knob Color Options

Standard colors



Dimensions

THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
	A MIN	A MAX	T	P-1	P-2	H-1	H-2
M3	1.6	-	15.6	0.9	4.6	14.7	11.0
#6-32	1.6	-	15.6	0.9	4.6	14.7	11.0