

SMT Series

- Material of plastic knob can sustain high temperature on SMT process.
- Production follows standard SMT process.
- Color management is available as required by customers.
- Functional device which prevents thread damage caused by inflow of tin in SMT process.

19 SERIES SMT Captive Screw Ø8mm Patented.



Material and Finish

Knob :
Plastic
Screw :
Hardened Carbon Steel, Zinc Finish.
Spring :
300 Series Stainless Steel, Natural Finish.
Ferrule :
Carbon Steel, Tin Finish.

Reel



Recess Style






PHILLIPS
No.2
Phillips Recess





6L
T15

Installation Style

Knob High and Screw Projection

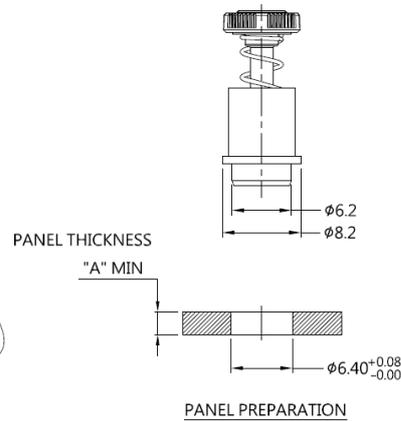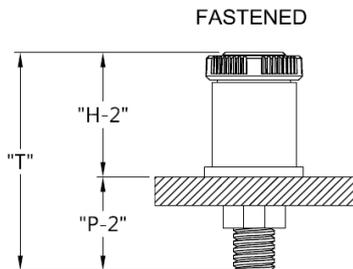

Installation

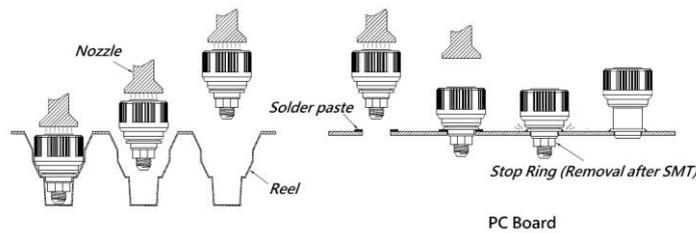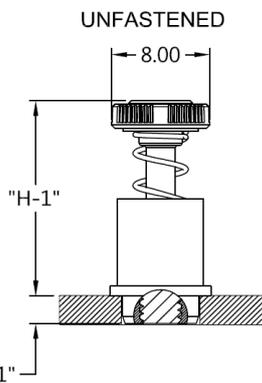

Knob Color Options



Dimensions

THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
	A MIN	A MAX	T	P-1	P-2	H-1	H-2
M3.5	2.4	-	18.4	2.3	7.9	16.1	10.5
#6-32	1.0	-	14	0.6	4.3	13.4	9.7