

- Material of plastic knob can sustain high temperature on SMT process.
- Production follows standard SMT process.
- Color management is available as required by customers.
- Functional device which prevents thread damage caused by inflow of tin in SMT process.

## 19 SERIES Low Profile SMT Captive Screw Ø10mm patented.




### Material and Finish

**Knob :**  
Plastic  
**Screw :**  
Hardened Carbon Steel, Nickel Finish.  
**Spring :**  
300 Series Stainless Steel, Natural Finish.  
**Ferrule :**  
Carbon Steel, Tin Finish.


### Reel





### ■ Recess Style

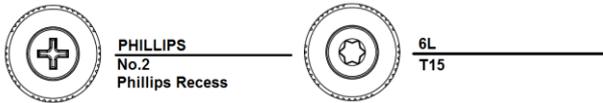



### ■ Installation Style




### ■ Knob High and Screw Projection

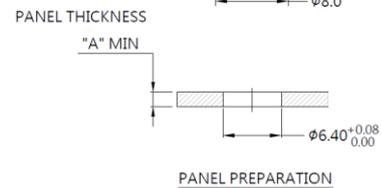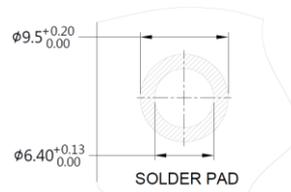

### ■ Installation

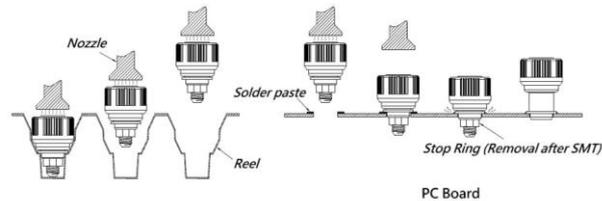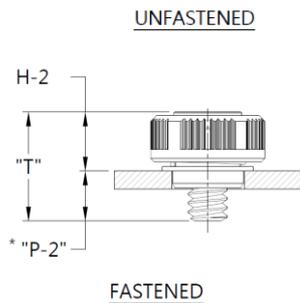

### ■ Knob Color Options

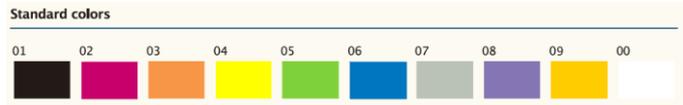

### ■ Dimensions

THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT	
	A MIN	A MAX	T	P-1	P-2	H-1	H-2
#6-32	1.6	-	9.6	1.4	4.2	8.2	5.4
M3	0.8	-	9.0	1.2	4.0	7.8	5.0