



- Efficient performance in assembly, decomposition, and repair
- Forms one-piece with the main structure, hand pull could achieve the positioning
- Pull and turn for locking, easy to operate

101 SERIES PRESS-IN patented.

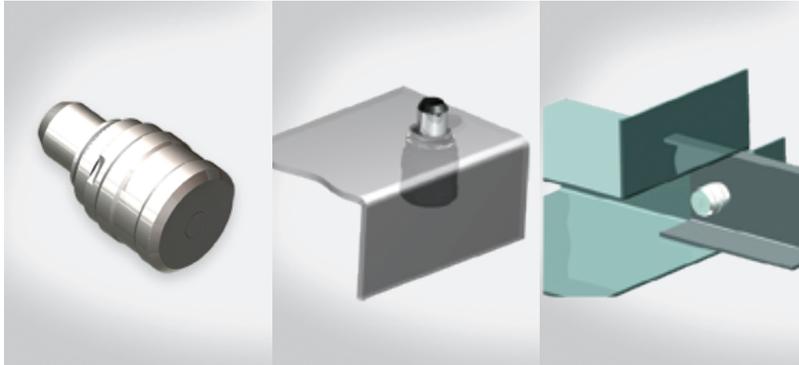


Material and Finish

- Stud:**
Steel, zinc plate, chromate plus sealer.
- Pincap:**
Steel, zinc plate, chromate plus sealer.
- Spring:**
300 series stainless steel.
- Ferrule:**
Hardened carbon steel, nickel plated finish.

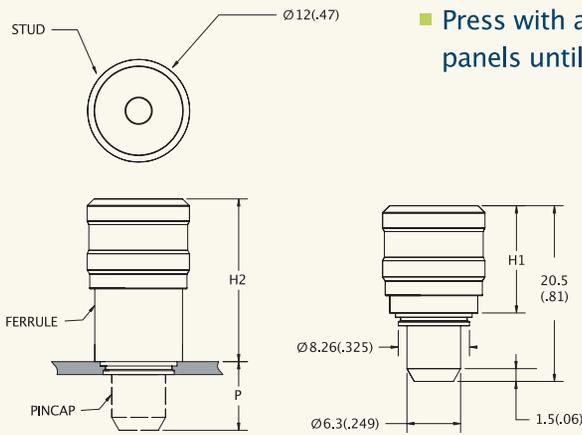

- Press with approximately 13,400 N (3000 lbf.) for steel panels until ferrule sits flush with panel.

Installation

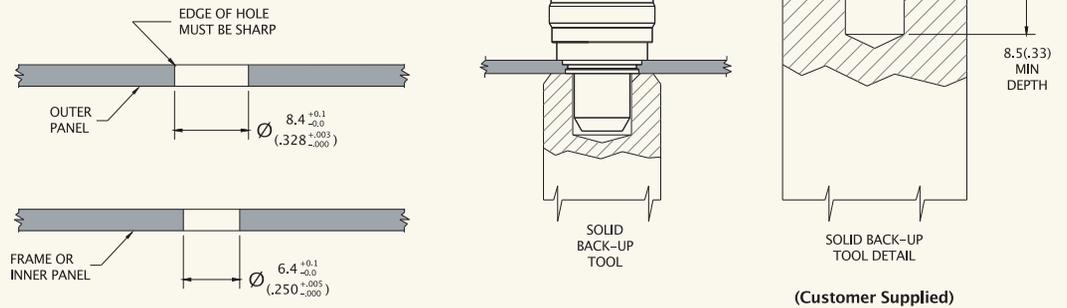

Dimensions

mm

PANEL THICKNESS		P	KNOB STYLE	PART NUMBER		H1 CLOSED	H2 OPEN
MIN	MAX			Hold Open	Without Hold Open		
1.52	3.81	8.2	BRIGHT	57-101	57-102	12.5 (.49)	19.3 (.76)