- Effcient performance in assembly, decomposition, and repair
- Forms one-piece with main struture, hand pull could achieve the positioning
- Hold open feature available. Pull and turn for locking, easy to operate

521 SERIES patented.

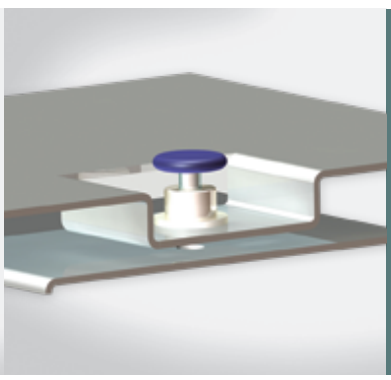

Material and Finish

Stud:
Hardened carbon steel, zinc finish.

Pincap:
Hardened carbon steel, zinc finish.

Spring:
300 series stainless steel.

Ferrule:
Flare-in: 6000 series aluminum
Press-in: Hardened carbon steel, zinc.

Flare-in Style

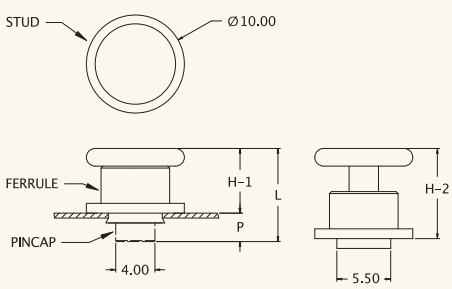

Flare-in with approximately 2,500 N until ferrule is flare into the panel.

PC BOARD Style

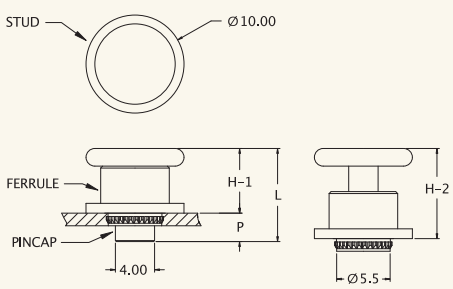

P.C Board Installation Force 2500~3000 N.



Installation

Flare-in Style



PC BOARD Style



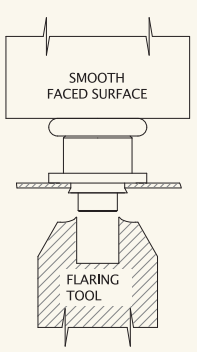

Dimensions

Flare-in Style

mm

PANEL THICKNESS		P	KNOB STYLE	PART NUMBER	H-1 CLOSED	H-2 OPEN	L
MIN	MAX						
0.5	0.6	2.9	Bright	57-521	6.6	9.2	9.5

PC Board Style

mm

PANEL THICKNESS		P	KNOB STYLE	PART NUMBER	H-1 CLOSED	H-2 OPEN	L
MIN	MAX						
1.6	1.8	2.9	Bright	57-541	6.6	9.2	9.5