

## SMT PLUNGER

- Efficient performance in assembly, decomposition, and repair
- Fast installation and removal for sliding module.
- Color management for plastic is available as required by customers.
- Reduce damage risk of circuit caused during assembling.


## 59 SERIES SMT $\varnothing 9\text{mm}$ Patented.




### Material and Finish

**Cap :**  
 Carbon Steel, Zinc Finish, Plastic  
**Pin :**  
 300 Series Stainless Steel, Natural Finish.  
**Spring :**  
 300 Series Stainless Steel, Natural Finish.  
**Ferrule :**  
 Carbon Steel, Tin Finish.


### ■ Projection

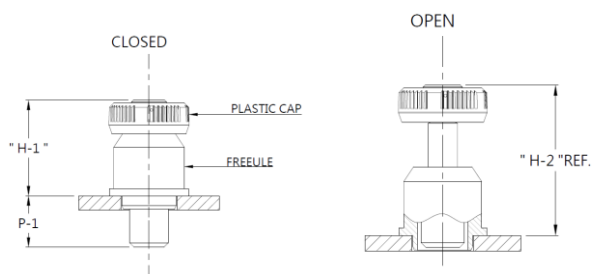

### ■ Installation Style

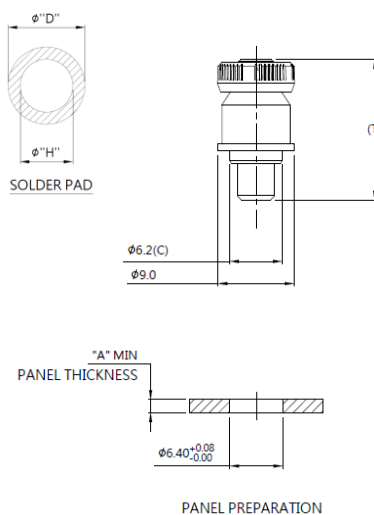

### ■ SMT Installation

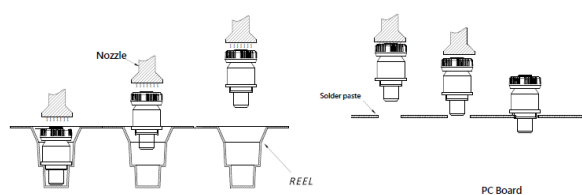

### ■ Knob Color Options



### ■ Dimensions

PIN LENGTH "T"	OUTER PANEL DIMENSIONS		P		H-1 CLOSED	H-2 OPEN	$\varnothing$ "H" HOLE SIZE IN SHEET	$\varnothing$ "D" MIN SOLDER PAD
	A MIN	A MAX	P1	P2				
16.2	1.6	-	5.05	0	11.15	15.15	6.4	10.2
16.6	1.6	-	5.8	0	10.8	15.35	6.4	10.2
21.6	1.6	-	7.45	0	14.15	20.65	6.4	10.2