


- Screw ejecting function meets designed function of quick vertical separation
- Able to achieve the energy-saving of splitting connector effectively
- Screw sizes and hand screwing mechanism can be made according to specs required by customers

47 SERIES

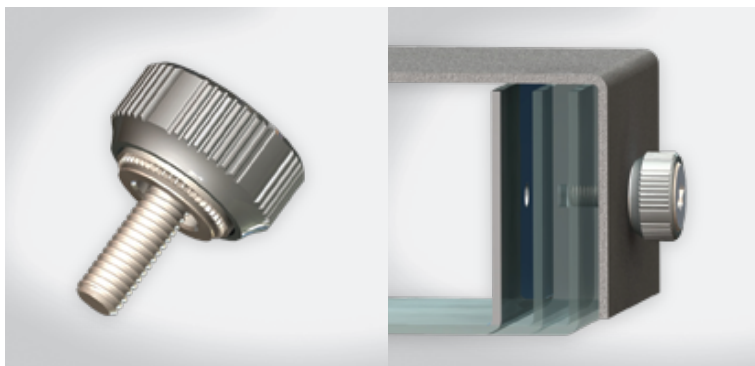

Material and Finish

Knob:
6000 Series aluminum.


Screw:
Hardened carbon steel, nickel finish.

Ferrule:
Hardened carbon steel, nickel finish.

■ Recess Style




■ Knob Height and Screw Projection

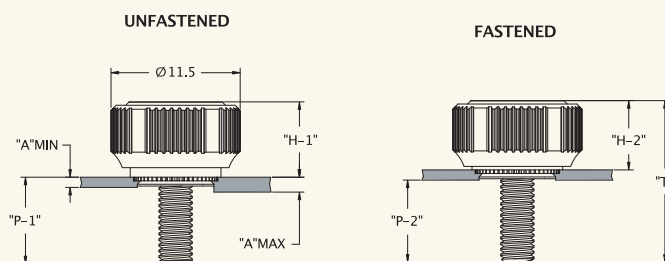


■ Styled Knob Series Panel Preparation and Installation

For Thread Size	ØD	Clearance Hole +0.2 (+.008) -0.1 (-.004)
M3	6.8 ^{+0.08} ₋₀ (.268 ^{+0.003} _{-.000})	4.0 (.157)

■ Application

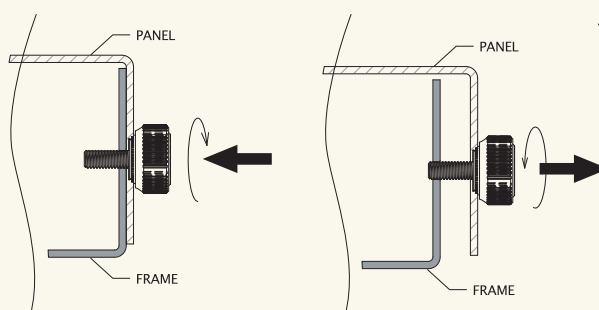

■ Installation Style

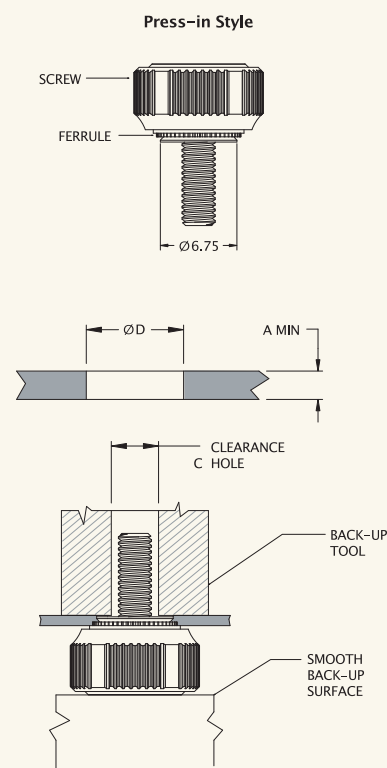

mm

THREAD	OUTER PANEL DIMENSIONS		SCREW PROJECTION			KNOB HEIGHT		TOTAL FLOAT	PART NUMBER		
	A MIN	A MAX	T	P-1	P-2	H-1	H-2		Phillips Recess	6L Recess	6L/Slot Recess
M3	0.80	~	10.5	4.0	4.4	6.5	6.1	0.4	47-112-210	47-112-310	47-112-410
			13.5	7.0	7.4				47-112-220	47-112-320	47-112-420