- Wheel Rollers installed on board, to accelerate the thrust/tensile
- Designate to accelerate the maintenance efficiency performance
- Energy saving, effort saving, time efficiency

Wheel Roller- on board type

Patented.




Material and Finish

Ferrule:
CARBON STEEL, ZINC FINISH.
SPRING PIN:

CARBON STEEL , BLACK OXIDE FINISH.

Roller:

CARBON STEEL , NICKEL FINISH . WHEEL ROLLER : LOAD CAPACITY 4.5 kg .

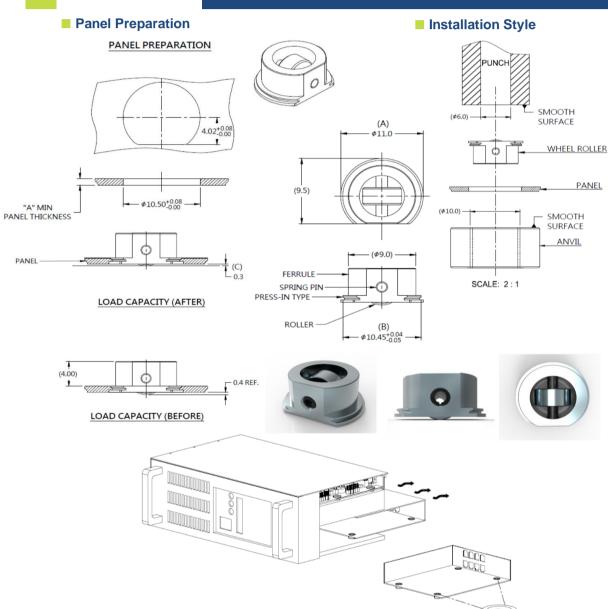

■ Dimensions(mm)

SCREW	SCREW PROJECTION		PANEL THICKNESS		DIMENSINOS	
LENGTH "T"	"P-1"	"P-2"	"A" MIN	"A" MAX	"L"	" B "
~ ~		~	1.0	2.6	~	~

Copyright © Since 2007-2018 Fivetech Technology Inc. All Right Reserved.

- Wheel Rollers installed on board, to accelerate the thrust/tensile
- Designate to accelerate the maintenance efficiency performance
- Energy saving, effort saving, time efficiency

Wheel Roller- below board type


Patented.



Material and Finish

Ferrule:
CARBON STEEL, ZINC FINISH.
SPRING PIN:
CARBON STEEL, BLACK OXIDE FINISH.

CARBON STEEL , NICKEL FINISH .
WHEEL ROLLER : LOAD CAPACITY

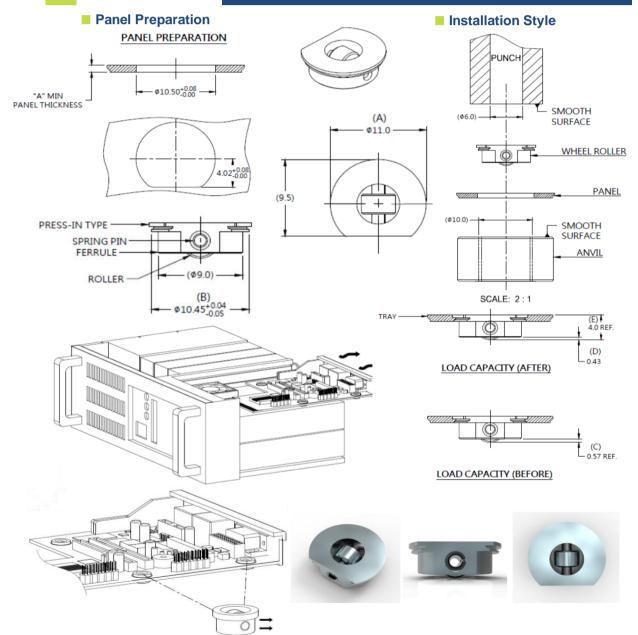

■ Dimensions(mm)

	SCREW	SCREW PROJECTION		PANEL THICKNESS		DIMENSINOS	
	LENGTH "T"	"P-1"	"P-2"	"A" MIN	"A" MAX	"L"	"B"
	~	~	~	1.0	2.6	~	~

Copyright © Since 2007-2018 Fivetech Technology Inc. All Right Reserved.

- Wheel Rollers installation to accelerate the thrust/tensile
- Designate to accelerate the maintenance efficiency performance
- Energy saving, effort saving, time efficiency
- Plastic Rollers are available

WHEEL ROLLER-Plastic type

Patented.




Material and Finish
ROLLER:
PLASTIC: PANTONE (GREEN)
RIVET:
300 SERIES STAINLESS STEEL, NATURAL FINISH.

FERRULE:

CARBON STEEL , ZINC FINISH.

Panel Preparation

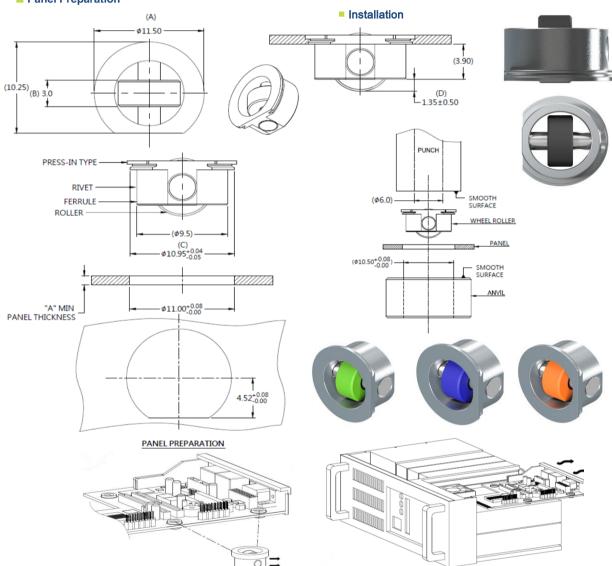

Dimensions (mm)

SCREW LENGTH	5	SCREW PROJECTION		PANEL THICKNESS		DIMENSINOS	
"T"		"P-1"	"P-2"	"A" MIN	"A" MAX	"L"	"B"
~		~	~	1.0	2.6	~	~

Copyright© Since 2007-2019 Fivetech Technology Inc. All Right Reserved.